

Light Efficiency:

6 Lumen/Watt

Light Quality:

CRI: 51.4

Color Temperature:

3074 K

Output: 3822 lm

Peak: 2482049 cd

Power: 627 W

PF: 1.0



Beam Angle

2.6°

Product Name:

Platinum FLX


Test:

Spot CTO color wheel Zoom In

Date:

1/26/2018


Note:

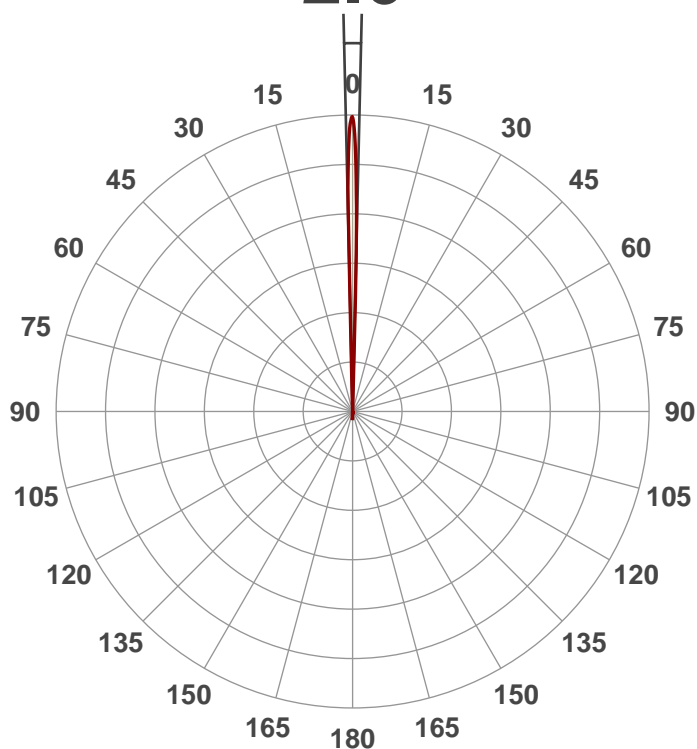


CIE 1931
x: 0.434
y: 0.407

Spectra



Dominant Wavelength: 583nm

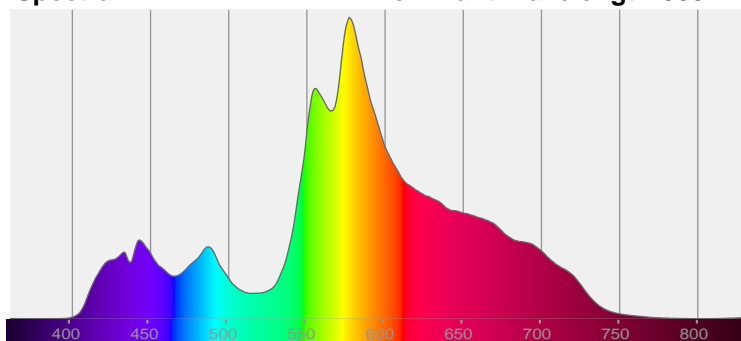


Power

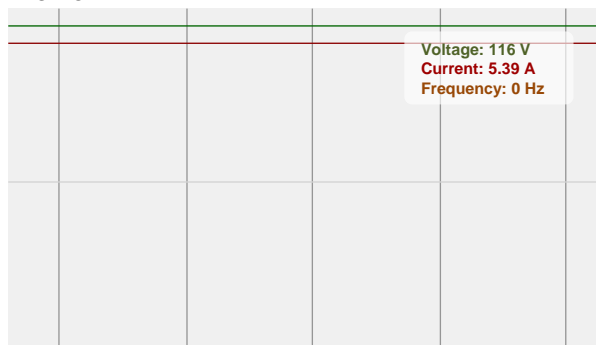


Color Details

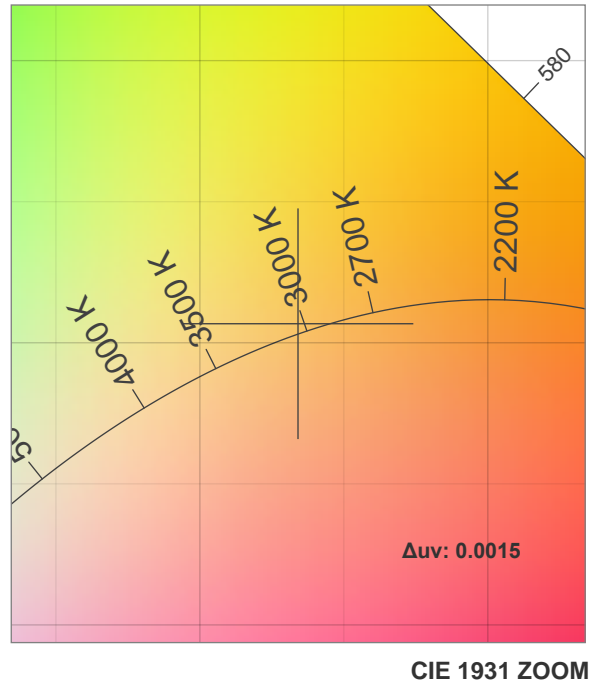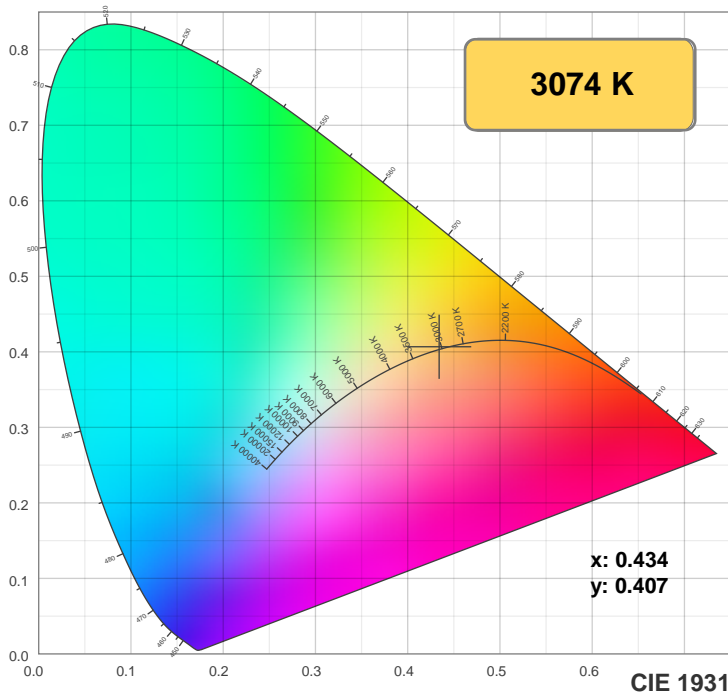

TM30: 55.7

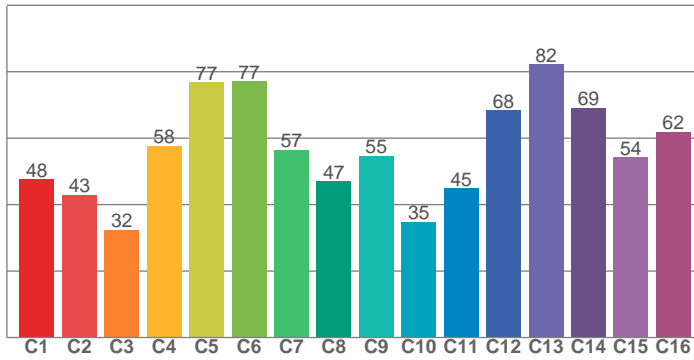

CRI: 51.4 (R1-R8)

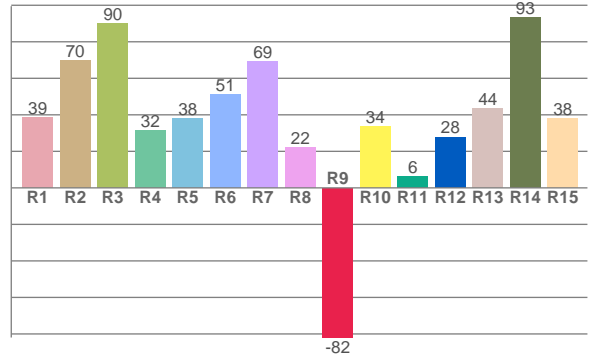

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
38.8	70.0	90.1	31.5	38.0	51.1	69.4	22.3	-82.0	33.7	6.1	27.9	43.6	93.3	37.8


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
47.6	42.9	32.4	57.6	76.8	77.1	56.5	47.0	54.7	34.9	44.9	68.4	82.2	69.1	54.2	61.8

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
61.6	95.5	60.2	37.5	40.9	39.7	42.0	65.2	91.0	73.0	54.6	48.1	48.3	40.0	47.5


CQS: 52.7

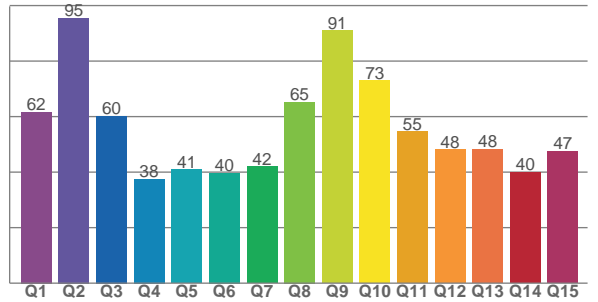

Color Parameters

Color Temperature	Color Rendering Index	Red Component	Color Fidelity	Color Gamut	Color Quality Scale	Color Coordinate CIE 1931	Color Coordinate CIE 1931	Color Coordinate	Color Coordinate	Color Deviation from Black Body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3074 K	51.4	-82.0	55.7	80.3	52.7	0.434	0.407	0.248	0.348	0.0015

Beam Details

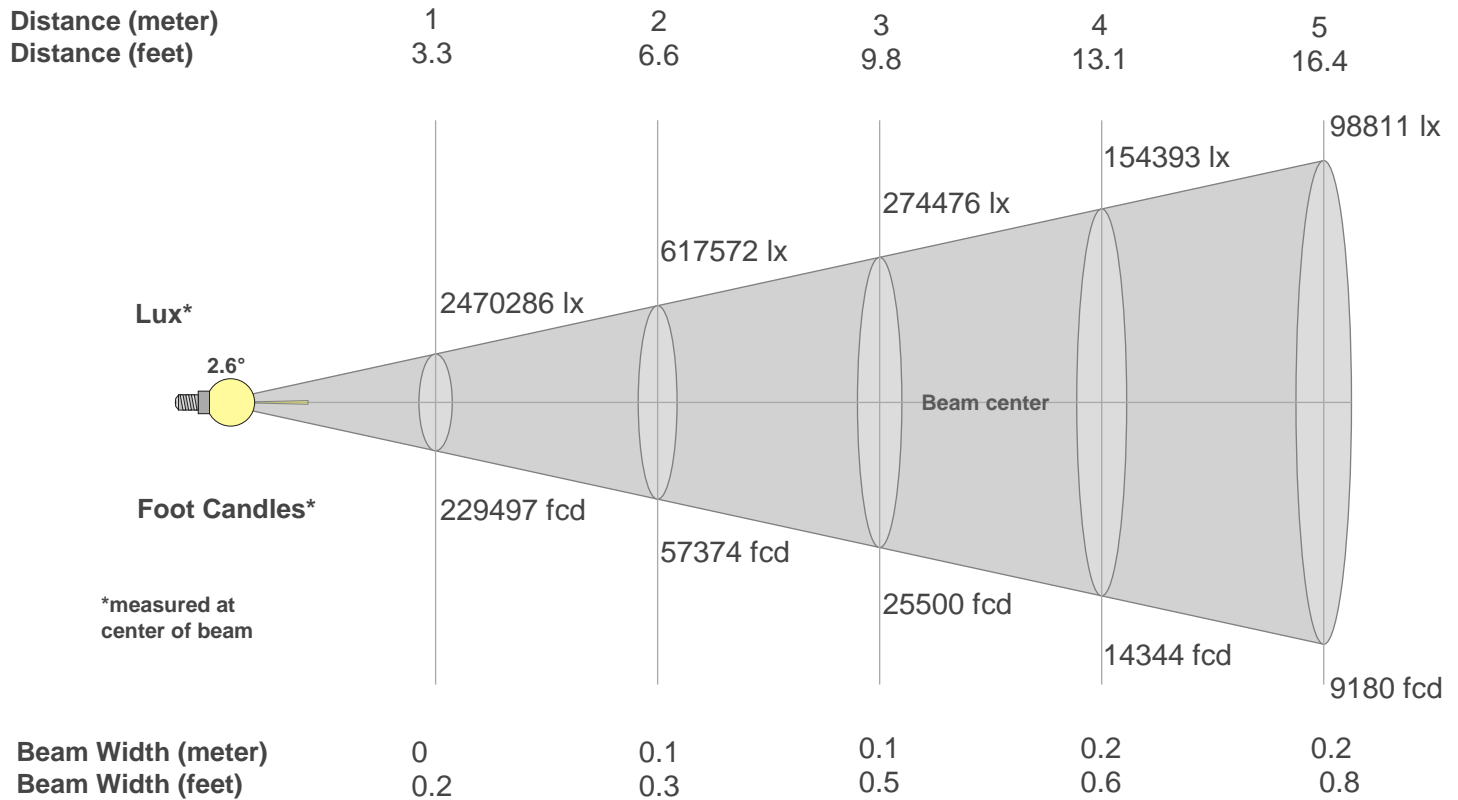

Beam Intensities from 1-20m

m	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
ft	3.3	6.6	9.8	13.1	16.4	19.7	23	26.2	29.5	32.8	36.1	39.4	42.7	45.9	49.2	52.5	55.8	59.1	62.3	65.6
lx	2470286	617572	274476	154393	98811	68619	50414	38598	30497	24703	20416	17155	14617	12604	10979	9650	8548	7624	6843	6176
fcd	229497.1	57374.3	25499.7	14343.6	9179.9	6374.9	4683.6	3585.9	2833.3	2295	1896.7	1593.7	1358	1170.9	1020	896.5	794.1	708.3	635.7	573.7

Intensities in 0° C-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
2.5M	2.1M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M
100%	85%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%

Intensities in 90° C-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
2.5M	2.1M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M
100%	85%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%

Intensities in 180° C-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
2.5M	1.8M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M
100%	73%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%

Intensities in 270° C-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
2.5M	1.8M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M
100%	73%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%

Beam Angle 50%	Field Angle 10%	Cutoff Angle 2,5%	Intensity Ratio in 120° Cone	Intensity Ratio in 90° Cone
2.6°	3.1°	3.3°	100.0%	100.0%