



## CW PROFILE HP IP™



The IP65 rated CW Profile HP IP™ ellipsoidal features a High Power 130W Cool White 5,600K LED engine producing >90CRI and 12,000+ total lumens, 19°, 26°, 36°, and 50° interchangeable lens options (sold separately), (4) blade manual framing shutters, supports B size metal gobos (gobo holder not included) and an optional IP65 rated DMX controlled dual gobo rotator (sold separately), manual focus, DMX controlled electronic strobe, 16bit dimming and selectable dimming curve modes, flicker free operation for TV and FILM, adjustable refresh frequency and gamma brightness, IP rated 5pin DMX and IP65 Locking Power Cable in/out connections, (4) button LCD control display panel, an integrated rigging yoke, quiet fan cooling, and a multi-voltage universal auto switching power supply (100-240v).

\*Optional IP65 Dual Gobo Rotator shown.

### FEATURES

**IP65 Rated High Power Ellipsoidal**

**130W Cool White 5,600K LED Engine**

**>90CRI and 12,000+ Total Lumens Output**

**19°, 26°, 36°, 50° Lens Options (sold separately)**

**Supports B Size Metal Gobos (gobo holder not included)**

**IP65 DMX Controlled Dual Gobo Rotator (sold separately)**

**(4) Blade Manual Framing Shutters**

**DMX Controlled Electronic Strobe and 16bit Dimming**

**Selectable Dimming Curve Modes**

**Flicker Free Operation for TV and FILM**

**Adjustable Refresh Frequency and Gamma Brightness**

**Quiet Fan Cooling**



ELATION | CW PROFILE HP IP | Product Specification Sheet

Specifications subject to change without notice ©Elation Professional 03/05/19

Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA. 90040  
323-582-3322 | 323-832-9142 fax | [www.elationlighting.com](http://www.elationlighting.com) | [info@elationlighting.com](mailto:info@elationlighting.com)

Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, The Netherlands  
+31 45 546 85 66 | +31 45 546 85 96 fax | [www.elationlighting.eu](http://www.elationlighting.eu) | [info@elationlighting.eu](mailto:info@elationlighting.eu)

**SPECIFICATIONS**

**SOURCE**

High Power 130W 5,600K Cool White LED Engine  
50,000 Hour Average LED Life\*

\*May vary depending on several factors including but not limited to:  
Environmental Conditions, Power/Voltage, Usage Patterns (On-Off Cycling), Control and Dimming.

**PHOTOMETRIC DATA**

>90CRI | 12,000+ Total Lumens

**EFFECTS**

Electronic Strobe and 16bit Dimming  
Selectable Dimming Curve Modes

**GOBOS**

Supports "B" Size Metal Gobos (gobo holder not included)  
IP65 Rated DMX Controlled Dual Gobo Rotator\*\*

\*\*Gobo Rotator Sold Separately

**CONTROL / CONNECTIONS**

4 DMX Channel Modes (1 / 3 / 6 / 8)  
Adjustable Refresh Rates  
Adjustable Gamma Brightness  
4 Button Control Panel / LED Menu Display  
IP Rated 5pin DMX In/Out / IP65 Locking Power Cable In/Out

**SIZE / WEIGHT**

Length: 29.6" (753mm)  
Width: 13.9" (353mm)  
Vertical Height: 18.9" (480mm)  
Weight: 24 lbs. (11kg)

**ELECTRICAL / THERMAL**

Quiet Fan Cooling  
AC 100-240V - 50/60Hz  
170W Max Power Consumption  
14° to 113°F (-10° to 45°C)

**APPROVALS / RATINGS**



IP65




Intertek  
4010832

**INCLUDED ITEMS**

IP65 Locking Power Cable

**DIMENSIONAL DRAWINGS**

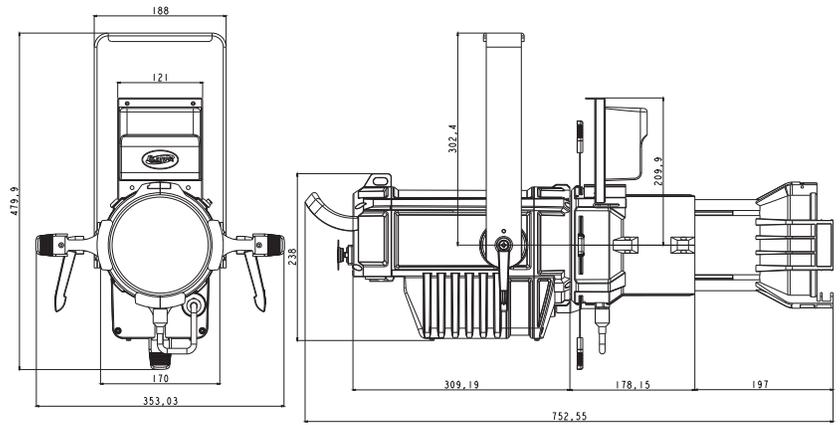

19°, 26°, 36°, 50° LENS Options (sold separately)



IP65 DUAL GOBO DMX CONTROLLED ROTATOR (sold separately)

**ORDERING INFORMATION**

PRODUCT ORDER CODE	
<b>CWP713</b>	CW PROFILE HP IP
OPTIONAL ACCESSORIES ORDER CODES	
<b>QUICK RIG CLAMP</b>	Low Profile Quick Release Clamp
<b>IPR701</b>	IP65 Rated DMX Controlled Dual Gobo Rotator
<b>PHD019</b>	Profile High Definition Lens 19°
<b>PHD126</b>	Profile High Definition Lens 26°
<b>PHD236</b>	Profile High Definition Lens 36°
<b>PHD350</b>	Profile High Definition Lens 50°
<b>NEU088</b>	3 ft. (1m) IP65 Locking Power Link Cable



Specifications subject to change without notice ©Elation Professional 03/05/19

Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA. 90040  
323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com

Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, The Netherlands  
+31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu