



WW PROFILE HP IP™

The IP65 rated WW Profile HP IP™ ellipsoidal features a High Power 130W Warm White 3,000K LED engine producing >91CRI and 10,000+ total lumens, 19°, 26°, 36°, and 50° interchangeable lens options (sold separately), (4) blade manual framing shutters, supports B size metal gobos (gobo holder not included) and an optional IP65 rated DMX controlled dual gobo rotator (sold separately), manual focus, DMX controlled electronic strobe, 16bit dimming and selectable dimming curve modes, flicker free operation for TV and FILM, adjustable refresh frequency and gamma brightness, IP rated 5pin DMX and IP65 Locking Power Cable in/out connections, (4) button LCD control display panel, an integrated rigging yoke, quiet fan cooling, and a multi-voltage universal auto switching power supply (100-240v).



*Optional IP65 Dual Gobo Rotator shown.

FEATURES

IP65 Rated High Power Ellipsoidal

130W Warm White 3,000K LED Engine

>91CRI and 10,000+ Total Lumens Output

19°, 26°, 36°, 50° Lens Options (sold separately)

Supports B Size Metal Gobos (gobo holder not included)

IP65 DMX Controlled Dual Gobo Rotator (sold separately)

(4) Blade Manual Framing Shutters

DMX Controlled Electronic Strobe and 16bit Dimming

Selectable Dimming Curve Modes

Flicker Free Operation for TV and FILM

Adjustable Refresh Frequency and Gamma Brightness

Quiet Fan Cooling



ELATION | WW PROFILE HP IP | Product Specification Sheet

Specifications subject to change without notice ©Elation Professional 03/05/19

Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA. 90040
323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com

Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, The Netherlands
+31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu

SPECIFICATIONS

SOURCE

High Power 130W 3,000K Warm White LED Engine
50,000 Hour Average LED Life*

*May vary depending on several factors including but not limited to:
Environmental Conditions, Power/Voltage, Usage Patterns (On-Off Cycling), Control and Dimming.

PHOTOMETRIC DATA

>91CRI | 10,000+ Total Lumens

EFFECTS

Electronic Strobe and 16bit Dimming
Selectable Dimming Curve Modes

GOBOS

Supports "B" Size Metal Gobos (gobo holder not included)
IP65 Rated DMX Controlled Dual Gobo Rotator**

**Gobo Rotator Sold Separately

CONTROL / CONNECTIONS

4 DMX Channel Modes (1 / 3 / 6 / 8)
Adjustable Refresh Rates
Adjustable Gamma Brightness
4 Button Control Panel / LED Menu Display
IP Rated 5pin DMX In/Out / IP65 Locking Power Cable In/
Out

SIZE / WEIGHT

Length: 29.6" (753mm)
Width: 13.9" (353mm)
Vertical Height: 18.9" (480mm)
Weight: 24 lbs. (11kg)

ELECTRICAL / THERMAL

Quiet Fan Cooling
AC 100-240V - 50/60Hz
170W Max Power Consumption
14° to 113°F (-10° to 45°C)

APPROVALS / RATINGS



IP65




**Intertek
4010832**

INCLUDED ITEMS

IP65 Locking Power Cable
IP Rated 5pin DMX Cable

DIMENSIONAL DRAWINGS

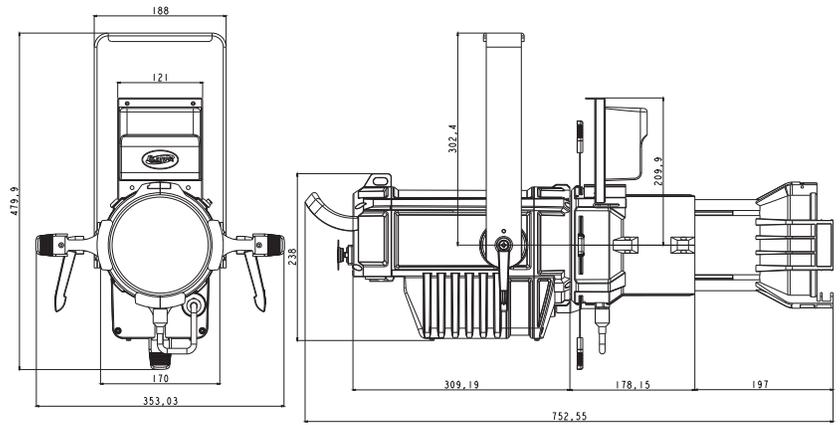

19°, 26°, 36°, 50° LENS Options (sold separately)



IP65 DUAL GOBO DMX CONTROLLED ROTATOR (sold separately)

ORDERING INFORMATION

PRODUCT ORDER CODE	
WWP702	WW PROFILE HP IP
OPTIONAL ACCESSORIES ORDER CODES	
QUICK RIG CLAMP	Low Profile Quick Release Clamp
IPR701	IP65 Rated DMX Controlled Dual Gobo Rotator
PHD019	Profile High Definition Lens 19°
PHD126	Profile High Definition Lens 26°
PHD236	Profile High Definition Lens 36°
PHD350	Profile High Definition Lens 50°
NEU088	3 ft. (1m) IP65 Locking Power Link Cable



Specifications subject to change without notice ©Elation Professional 03/05/19

Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA. 90040
323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com

Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, The Netherlands
+31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu