



VOLT Q5™

SKU# VOL053

The new IP65 rated Volt Q5™ features (5) 15W QUAD color RGBW LEDs, 7° beam 13° field angles, 180°+ manual LED head positioning, variable color correction (2,700K - 7,200K), magnetic frost filter gel frame, electronic strobe and dimming, flicker free operation for TV and FILM, rugged die-cast aluminum exterior, rubber padded base, retractable carrying handle, an internal wireless EWDMX receiver, and powered by a rechargeable Lithium-Ion battery.

FEATURES

IP65 Rated

7° Beam 13° Field Angles

(5) 15W QUAD Color RGBW LEDs

180°+ Manual LED Head Positioning

Variable Color Correction (2,700K - 7,200K)

Magnetic Frost Filter Gel Frame

Electronic Strobe and Dimming

Internal Wireless EWDMX Receiver

Rechargeable Lithium-Ion Battery

Flicker Free Operation for TV and FILM

Rugged Die-Cast Aluminum Exterior

Rubber Padded Base and Retractable Carrying Handle



PRODUCT SPECIFICATIONS

FEATURES

IP65 Rated
7° Beam and 13° Field Angles
180°+ Manual LED Head Positioning
Variable Color Correction (2,700K - 7,200K)
Internal Wireless EWDMM Receiver
Rechargeable Lithium-Ion Battery
Flicker Free Operation for TV and FILM
Rugged Die-Cast Aluminum Exterior
Rubber Padded Base and Retractable Carrying Handle

SOURCE

(5) 15W QUAD Color RGBW LEDs
100,000 Hour Average Life

PHOTOMETRIC DATA

16,130 LUX 1,498 FC @6.6 ft (2m) (7° Full ON)

EFFECTS

Variable Color Correction (2,700K - 7,200K)
Magnetic Frost Filter Gel Frame
Electronic Strobe and Dimming
Multiple Color and Chase Macros

CONTROL / CONNECTIONS

(4) DMX Channel Modes (4 / 5 / 7 / 9)
Internal Wireless EWDMM Receiver
(4) Button Control Panel
LCD Menu Display
3pin IP DMX In/Out
2pin IP Power Charger In

SIZE / WEIGHT (single unit)

Length: 11.4" (290mm)
Width: 9.9" (252mm)
Vertical Height: 11.4" (289mm)
Weight: 17.0 lbs. (7.7 kg)

ELECTRICAL / THERMAL

DC 22-26.2V
65W Max Power Consumption (each unit)
14°F to 113°F (-10°C to 45°C)

APPROVALS / RATINGS

CE | cETLus | IP65

INSTALLATION


Rigging: Clamps (Not Included) / Floor
Working Position: Any (360°)

INCLUDED ITEMS

(1) Volt Q5 26.2 VDC Charger + IEC Power Cable
(1) Volt Series 3pin IP Data Link Cable
(1) Volt Series 3pin IP to 3pin DMX Data Input Cable
(1) Magnetic Frost Filter
(1) Omega Bracket




PHOTOMETRIC DATA

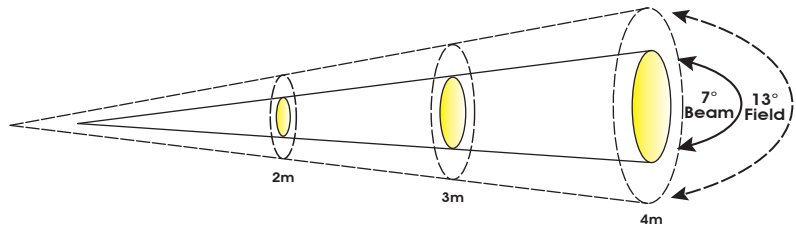

Distance	m	ft	m	ft	m	ft
	2	6.6	3	9.8	4	13.1
7° Beam Diameter	0.26	0.9	0.38	1.2	0.52	1.7
13° Field Diameter	0.47	1.5	0.68	2.2	0.91	3.0

Photometrics	lux	fc	lux	fc	lux	fc
RED LEDs	2,700	251	1,254	116	690	64
GREEN LEDs	6,700	622	3,095	288	1,731	161
BLUE LEDs	800	74	380	35	214	20
WHITE LEDs	7,907	735	3,670	341	2,054	191
FULL ON	16,130	1,498	7,260	674	4,072	378

DIMENSIONAL DIAGRAMS

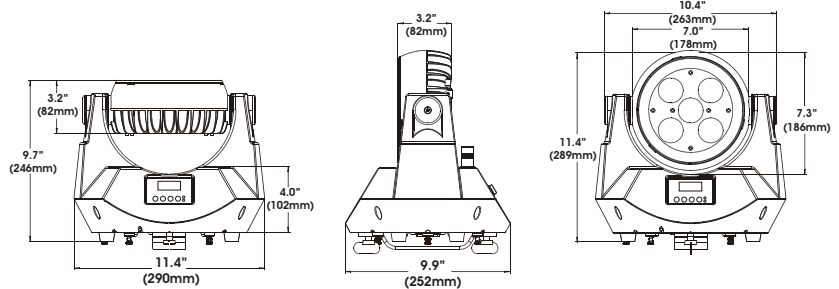

OPTIONAL ACCESSORIES

ORDER CODE	ITEM
TRIGGER CLAMP	Heavy Duty Wrap Around Hook Style Clamp
EWD001	EWDMM IP Wireless IP65 DMX Transceiver
VOLTSCHARGER	Volt Q5 26.2 VDC Charger + IEC Power Cable
VOLT/3MDLC	Volt Series 9.8 ft (3m) 3pin IP Male to 3pin IP Female DATA LINK Cable
VOLT/DIAC	Volt Series 9.8 ft (3m) 3pin IP Female to 3pin DMX Male DATA INPUT Cable
VOLT/DOAC	Volt Series 9.8 ft (3m) 3pin IP Female to 3pin DMX Female DATA Output Cable