



**PALADIN™
BRICK**



ELATION®

24x 15W RGBW LED IP65 Wash/Flood Fixture

DATA SHEET



KEY FEATURES

360W RGBW Flood Light

3x2 Cell Control

Rugged IP65 Design for Outdoor Events

Floor Standing or Mountable in any Orientation

The **PALADIN BRICK™** is a compact and powerful outdoor flood light for a wide variety of applications. Using 24x15W RGBW cells it provides a total output of up to 8,200 lumens. Certified to IP65 it features a rugged design with a solid build quality, eliminating the need to worry about dust and water ingress. IP rated connections make it an ideal product to illuminate large areas of any outdoor event with vibrant and powerful colors. It can be operated standing on the floor or be hung in any orientation using the provided omega brackets. Available cell control and strobe features make the **PALADIN BRICK** also a versatile effects fixture or audience blinder.





**PALADIN™
BRICK**



24x 15W RGBW LED IP65 Wash/Flood Fixture

SPECIFICATIONS

SOURCE

24x 15W RGBW LED Emitters
50,000 Hour Average LED Life*

*Test lab conditions. May vary depending on several factors including but not limited to: Environmental Conditions, Power/Voltage, Usage Patterns (On-Off Cycling), Control, and Dimming.

PHOTOMETRIC DATA

6,000K Color Temperature
8,200 Total Lumen Output
14.1° Beam 25.4° Field Angle (without diffuser)
25.3° Beam 50° Field Angle (with diffuser)

PHOTOMETRIC DATA

6,000K Color Temperature
8,200 Total Lumen Output
14.1° Beam 25.4° Field Angle (without diffuser)
25.3° Beam 50° Field Angle (with diffuser)

CONTROL / CONNECTIONS

11 DMX Channel Modes (56 Total Channels)
3x2 Cell Control
Manual Tilt Adjustment
DMX, RDM Protocol Support
Standalone and Primary/Secondary Operation
4 Button OLED Control Display
Elation's E-FLY™ Internal Wireless DMX Transceiver
IP65 5pin DMX In/Out
IP65 Power In/Out
With Wired Digital Communication Network

SIZE / WEIGHT

Length: 17.2" (438mm)
Width: 5.8" (147mm)
Height: 11.3" (286mm)
Weight 21 lbs (9.5kg)

ELECTRICAL / THERMAL

AC 100-240V - 50/60Hz
390W Max Power Consumption
5°F to 113°F (-15°C to 45°C)

APPROVALS / RATINGS

CE | cETLus | IP65






**PALADIN™
BRICK**



ELATION®

24x 15W RGBW LED IP65 Wash/Flood Fixture

UNIT DIMENSIONS

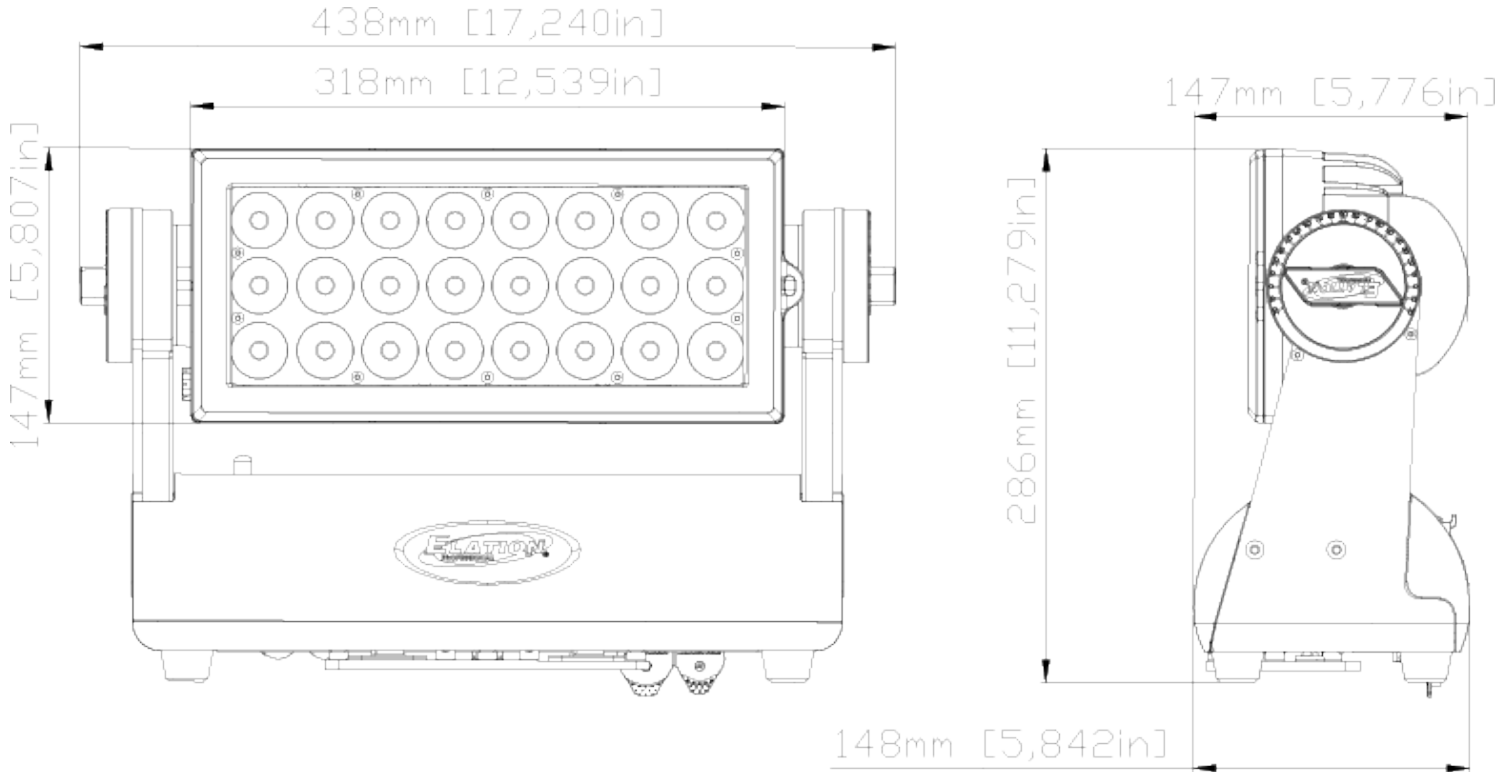

ORDERING INFORMATION

PAL264	Paladin Brick
PALADIN BRICK BARNDOOR	Barn Door
PALADIN BRICK SHADER	Shader
PALADIN BRICK FILTER 20°	20° Filter
PALADIN BRICK FILTER 60°	60° Filter
PALADIN BRICK FILTER 100°	100° Filter
PALADIN BRICK FILTER 40x1°	40x1° Filter
PALADIN BRICK FILTER 60x10°	60x10° Filter
PALADIN BRICK FILTER 1X40°	1X40° Filter
PALAXIN BRICK FILTER 10X60°	10x60° Filter

