

FUZE SPOT



The FUZE SPOT™ is an automated LED spot fixture designed for theater, television and a wide array of other precision lighting applications. The 92 CRI engine utilizes a 5-color homogenized LED array consisting of Red, Green, Blue, Mint, and Amber sources. The carefully tuned LEDs ensures accurate color reproduction while delivering a powerful output of over 10,000 lumens. Virtual color temperature, Magenta / Green adjustment plus CMY emulation provide the designer with immediate access to the impressive LED color array.

The FUZE SPOT is designed for any application where an automated ellipsoidal fixture with outstanding and impactful color range and quality is required. Dual rotating gobo wheels, animation wheel, frost, prism and iris round out its comprehensive feature set in a compact, quiet and lightweight fixture.

FEATURES

305W 6,500K 92CRI RGBMA LED Engine

10,000+ Total Lumen Fixture Output

7° to 42° Wide Zoom Range

Extended RGBMA Color Array and CMY Emulation

Virtual Color Correction and Gel Swatch Book

2 Gobo Wheels

Rotating / Indexing Interchangeable Glass Gobos

Animation Wheel

Variable Frost Filter, Motorized Iris, 4-Facet Prism

DMX Adjustable LED Refresh Rate Frequency

Hibernation Mode (Power Save)

Attachable 2-inch Snoot Included

Specifications subject to change without notice ©Elation Professional 10/09/20

Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA. 90040
323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com



Shown with included Snoot

Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, The Netherlands
+31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu

SPECIFICATIONS

SOURCE

305W 6,500K RGBMA LED Engine
30,000 Hour Average LED Life*

*Test lab conditions. May vary depending on several factors including but not limited to: Environmental Conditions, Power/Voltage, Usage Patterns (On-Off Cycling), Control, Dimming, and Lamp Mode.

PHOTOMETRIC DATA

10,100+ Total Lumen Output
CRI 92

Zoom Range 7° - 42°
Beam Angle 7.5° - 39.9°
Field Angle 8.6° - 44.2°

EFFECTS

Motorized Zoom
Variable Frost Filter
4-Facet Prism
Motorized Iris
Variable 16-bit Dimming Curve Modes
High Speed Electronic Shutter and Strobe

COLOR

Extended RGBMA Color Aray
CMY Emulation
Virtual Color Correction
Green/Magenta Shift
Virtual Gel Swatch Book

GOBOS

2x 6 Rotating / Indexing Interchangeable Glass Gobos
Animation Wheel

CONTROL / CONNECTIONS

4 DMX Channel Modes (RGBMA 31 / 41) (CMY 29 / 37)
16-bit Pan, Tilt, and Dimming Control
DMX Adjustable LED Frequency
DMX, RDM Protocol Support
4 Button Touch Control Panel
Full Color 180° Reversible LCD Menu Display
Locking 5pin XLR Connector In/Out
IP65 Locking Power Connector In/Out
With Wired Digital Communication Network

SIZE / WEIGHT

Length: 16.0" (407mm)
Width: 10.1" (256mm)
Vertical Height: 27.48" (698mm)
Weight: 46.3 lbs (21 kg)

ELECTRICAL / THERMAL


AC 100-240V - 50/60Hz
466 Max Power Consumption
14°F to 113°F (-10°C to 45°C)
BTU/hr (+/- 10%) 1589.06

APPROVALS / RATINGS


CE | cETLus | IP20

GOBOS | ANIMATION


INTERCHANGEABLE-ROTATING GLASS GOBO WHEEL 1

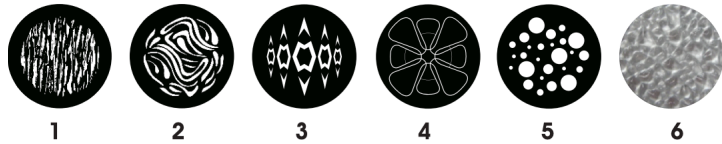


INTERCHANGEABLE-ROTATING GLASS GOBO WHEEL 2

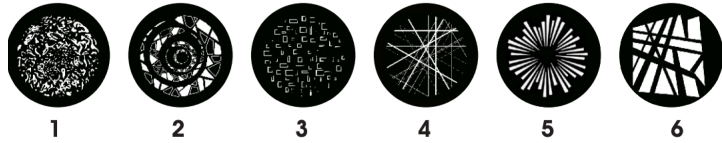

ANIMATION WHEEL



DIMENSIONAL DRAWINGS

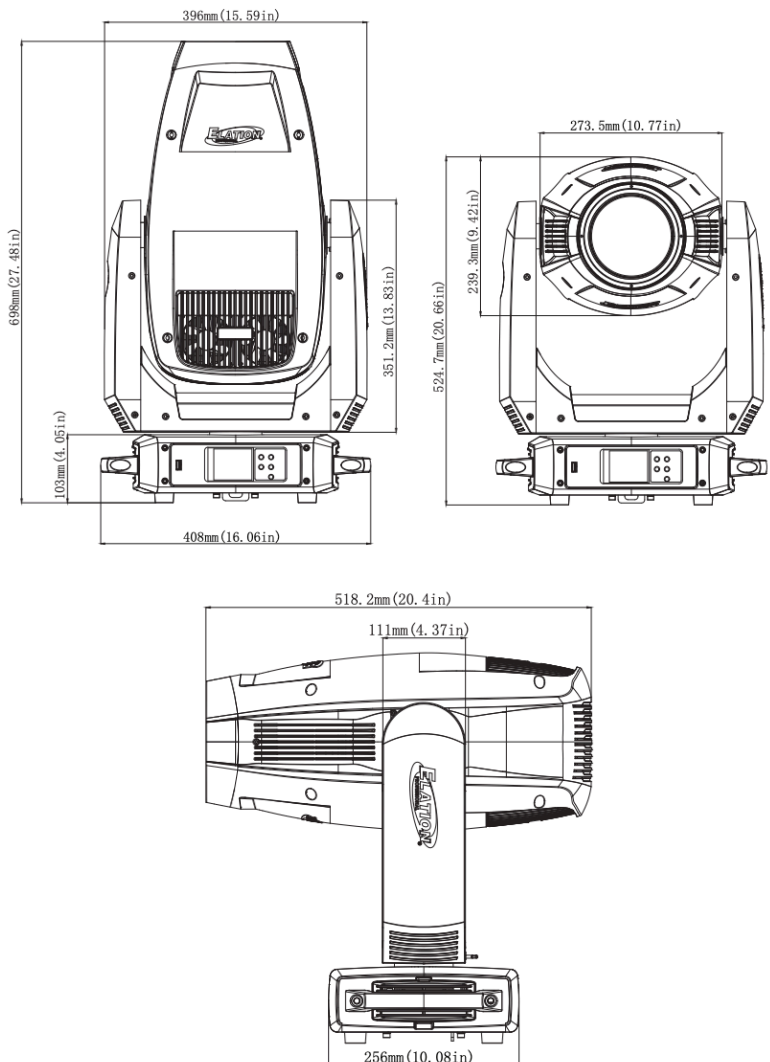

ORDERING INFORMATION

FUZZ296

FUZE SPOT



Specifications subject to change without notice ©Elation Professional 10/09/20

Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA, 90040
323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com

Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, The Netherlands
+31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu