



PRISMA DRIVER 8IP

SPECIFICATIONS / TECHNICAL DATA
REV A

CONSTRUCTION

Rugged IP65 Housing
Easy Keyhole Slots for Wall/Surface Mounting

CONTROL

Multiple DMX Channel Modes
Onboard 4 Button Touch Control Panel
DMX-512 and RDM Protocol Support

CONNECTIONS

8x 4pin locking output sockets (8 PRISMA MINI fixtures max)
Locking 5pin XLR Connector In/Out
IP65 Locking Power Connector In/Out
With Wired Digital Communication Network

SIZE / WEIGHT

Length: 4.05 in. (102.9mm)
Width: 10.4 in. (264.3mm)
Height: 8.74 in. (221.9mm)
Weight: 8.05 lbs. (3.65 kg)

ELECTRICAL

AC90-240V 50-60Hz
48VDC 8.3A
167W Max Power Consumption

THERMAL

Maximum Temperature (Ambient): 113° F (45° C)
Minimum Temperature (Ambient): 14° F (-10° C)

APPROVALS / RATINGS

CE | cETLus *Pending | IP20


specifications and documentation subject to change without notice.





PRISMA DRIVER 8IP

SPECIFICATIONS / TECHNICAL DATA
REV A

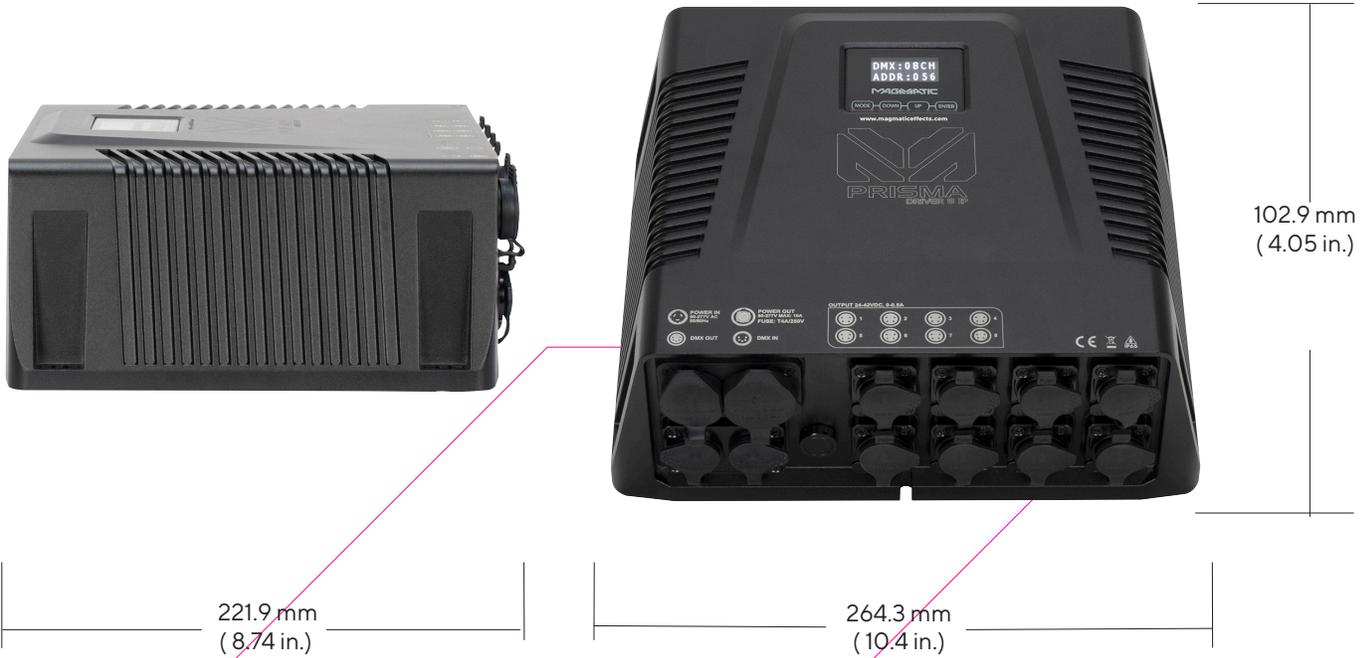

MAGMATIC