

Rayzor 760



7x60w RGBW Led Wash Fixture with SparkLED Effect, Zoom, Continuous pan/tilt

DATA SHEET



KEY FEATURES

LED Wash Effects Fixture

7x 60W OSRAM RGBW LED with Pixel Control

28x 2W SparkLED™ Effect with Pixel Control (patent pending)

Extreme Zoom – 5° for Mid-Air Beam to 77° for Even Washes

Fast and Precise 360° Continuous Pan and Tilt Rotation

Beam FX and Smooth Wash Fixture in a Compact Housing

The **Rayzor 760™** is a compact yet extremely powerful Wash Effects fixture featuring Elation's unique SparkLED™ system and fast continuous Pan and Tilt motion. With its wide zoom range from 5° to 77° it provides intense and well-defined mid-air beams at over 8,000 lumens as well as an exceptionally wide and even wash coverage, making it a perfect tool for any application, even in adverse outdoor conditions. SparkLEDs offer a prominent and innovative LED pixel effect with dedicated high brightness pixels inside the large front lenses for additional layers of creativity.

Driven by 7, independently controlled, 60W RGBW LEDs, delivering over 8,000 lumens of output with a total power of 420W, the **Rayzor 760** provides a powerful beam that stands out on any stage. The oversized front lenses create a large surface on the fixture that is enhanced by the exclusive patent pending SparkLEDs technology. SparkLEDs consists of 28 individual white LEDs, strategically placed inside the lens itself to create a unique additional layer, allowing designers access to a new and innovative way of creating interest on the stage. Rayzor 760 offers this never seen before style of internal lens illumination for depth and visual impact. SparkLEDs are controllable by the lighting console or driven by a multitude of internal FX patterns.

In addition to its powerful wash and enhanced effects, the **Rayzor 760™** offers precise continuous pan & tilt rotation, allowing variable speed from slow to extremely fast movement effects. Combining the powerful LED output with the SparkLEDs while utilizing the 360° movement, allows the designer to create endless, unique and appealing designs from mid-air beams or wide stage washes to subtle effects for mood or the TV camera lens.

The **Rayzor 760™** fixture ships in a cardboard box with a custom fitted polyurethane foam FIL (Foam In Lay) insert. This foam insert easily fits into any custom sized flight case (not included), and provides enhanced impact protection during transport.



Specifications are subject to change without notice ©Elation Professional 06/20/2023

Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA. 90040
323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com

Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, The Netherlands
+31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu

Rayzor 760



7x60w RGBW Led Wash Fixture with SparkLED Effect, Zoom, Continuous pan/tilt

SPECIFICATIONS

SOURCE

(7) 60W Osram RGBW LEDs
(28) 2W White SparkLED™
50,000 Hour Average LED Life*

*Test lab conditions. May vary depending on several factors including but not limited to: Environmental Conditions, Power/Voltage, Usage Patterns (On-Off Cycling), Control, and Dimming.

PHOTOMETRIC DATA

8,400 Total Lumen Output
CRI 80
Zoom Range 5° - 77°
Beam Angle 5.4° - 57.3°
Field Angle 7.4° - 73.3°

EFFECTS

Motorized Zoom
Linear Color Temperature Presets (2,700 - 8,000K)
RGBW Color Mixing and Pixel Control
White SparkLED Lens Effect
Color Presets and Macros
Electronic Strobe and Variable Dimming Curves
16-bit Dimming
Pan Angle: 540°/630°
Tilt Angle: 270°/360°

CONTROL / CONNECTIONS

3 DMX Channel Modes (25 / 52 / 80)
360° Continuous Pan and Tilt Movement
900 - 25,000 Hz DMX Adjustable Refresh Rate
6 Button Touch Panel
Full Color 180° Reversible LCD Menu Display
DMX, RDM, Art-NET, and sACN Protocol Support
5pin XLR DMX In/Out
RJ45 Ethernet In/Out
Locking Power Cable In/Out
USB Connection (Firmware Updates)
With Wired Digital Communication Network

SIZE / WEIGHT

Length: 13.4 in (340.4mm)
Width: 8.58 in (218.0mm)
Height: 16.67 in (423.4mm)
Weight: 27.0 lbs. (12.2kg)

ELECTRICAL / THERMAL

AC 100-240V - 50/60Hz
700W Max Power Consumption
14°F to 113°F (-10°C to 45°C)
BTU/hr (+/- 10%) 2216.5

APPROVALS / RATINGS

CE | cETLus | IP20 | FCC



Specifications are subject to change without notice ©Elation Professional 06/20/2023

Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA. 90040
323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com


Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, The Netherlands
+31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu

Rayzor 760



7x60w RGBW Led Wash Fixture with SparkLED Effect, Zoom, Continuous pan/tilt

RGBW / SPARKLED PIXEL MAPPING

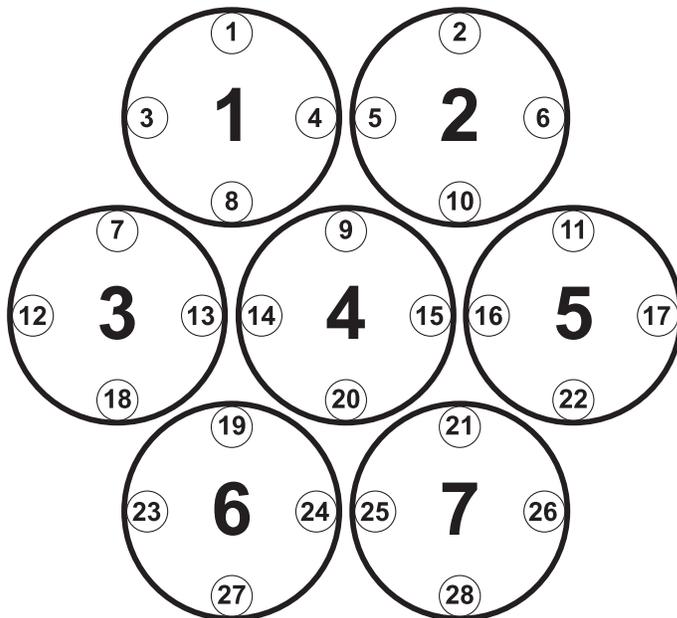

ORDERING INFORMATION

| | |
|--------------------|---|
| RAY760 / 123700191 | RAYZOR 760 |
| TRIGGER CLAMP | Heavy Duty Wrap Around Hook Style Clamp |
| STR527 | 5 ft. (1.5m) IP65 5pin XLR Cable |




Rayzor 760



7x60w RGBW Led Wash Fixture with SparkLED Effect, Zoom, Continuous pan/tilt

UNIT DIMENSIONS

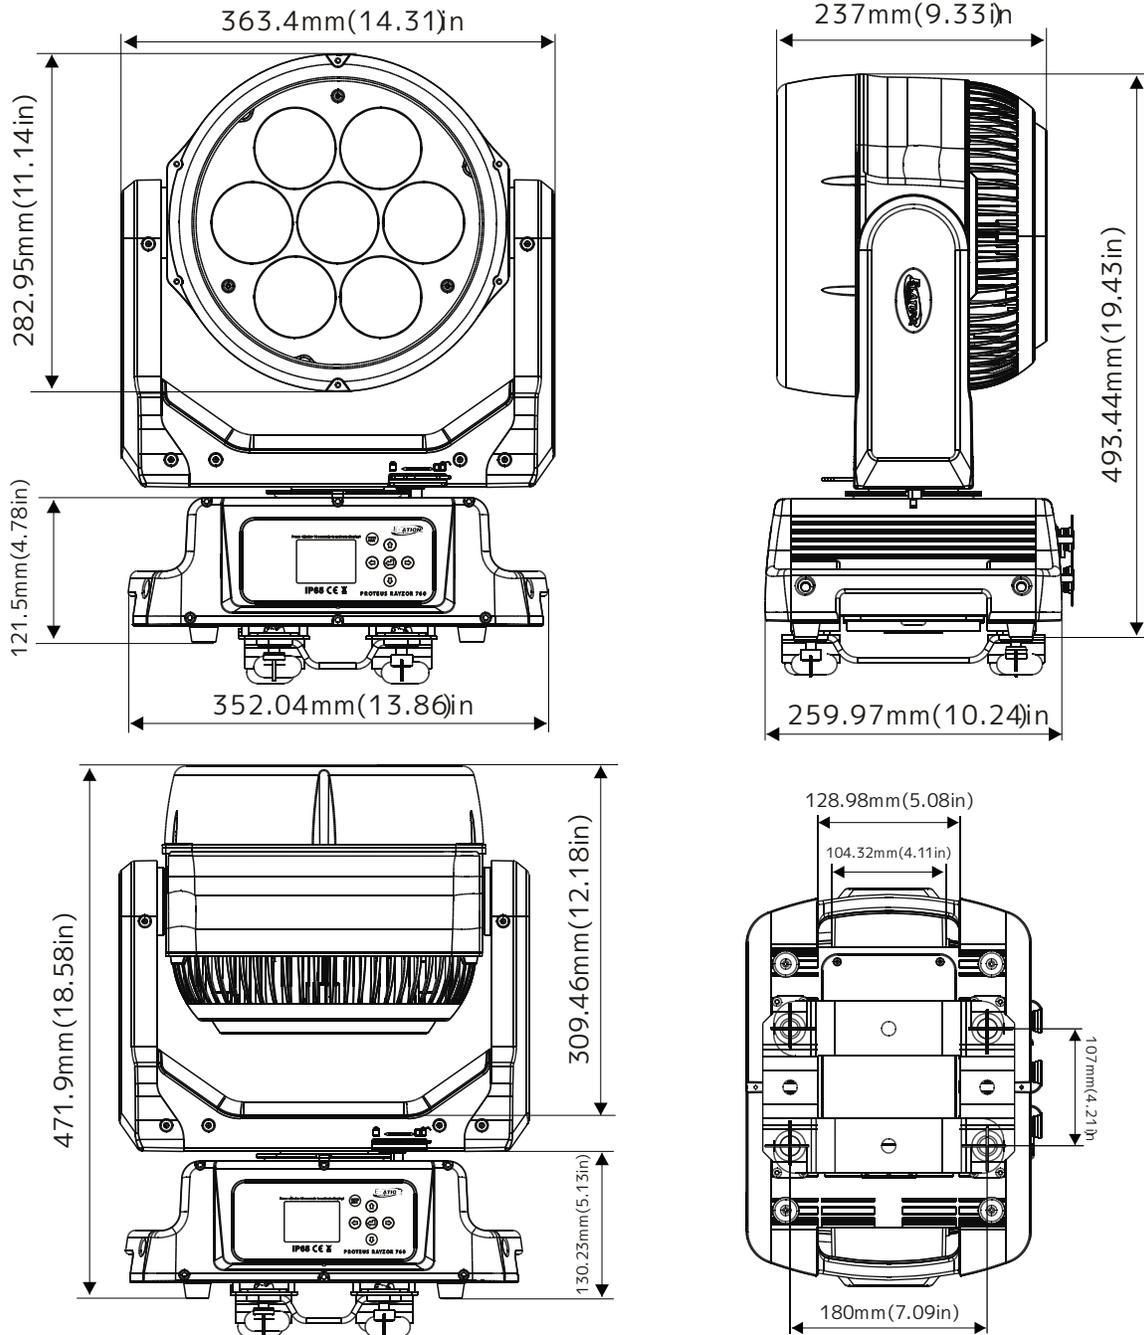

*Unit dimensions not to scale




Rayzor 760



7x60w RGBW Led Wash Fixture with SparkLED Effect, Zoom, Continuous pan/tilt

FOAM IN-LAY DIMENSIONS

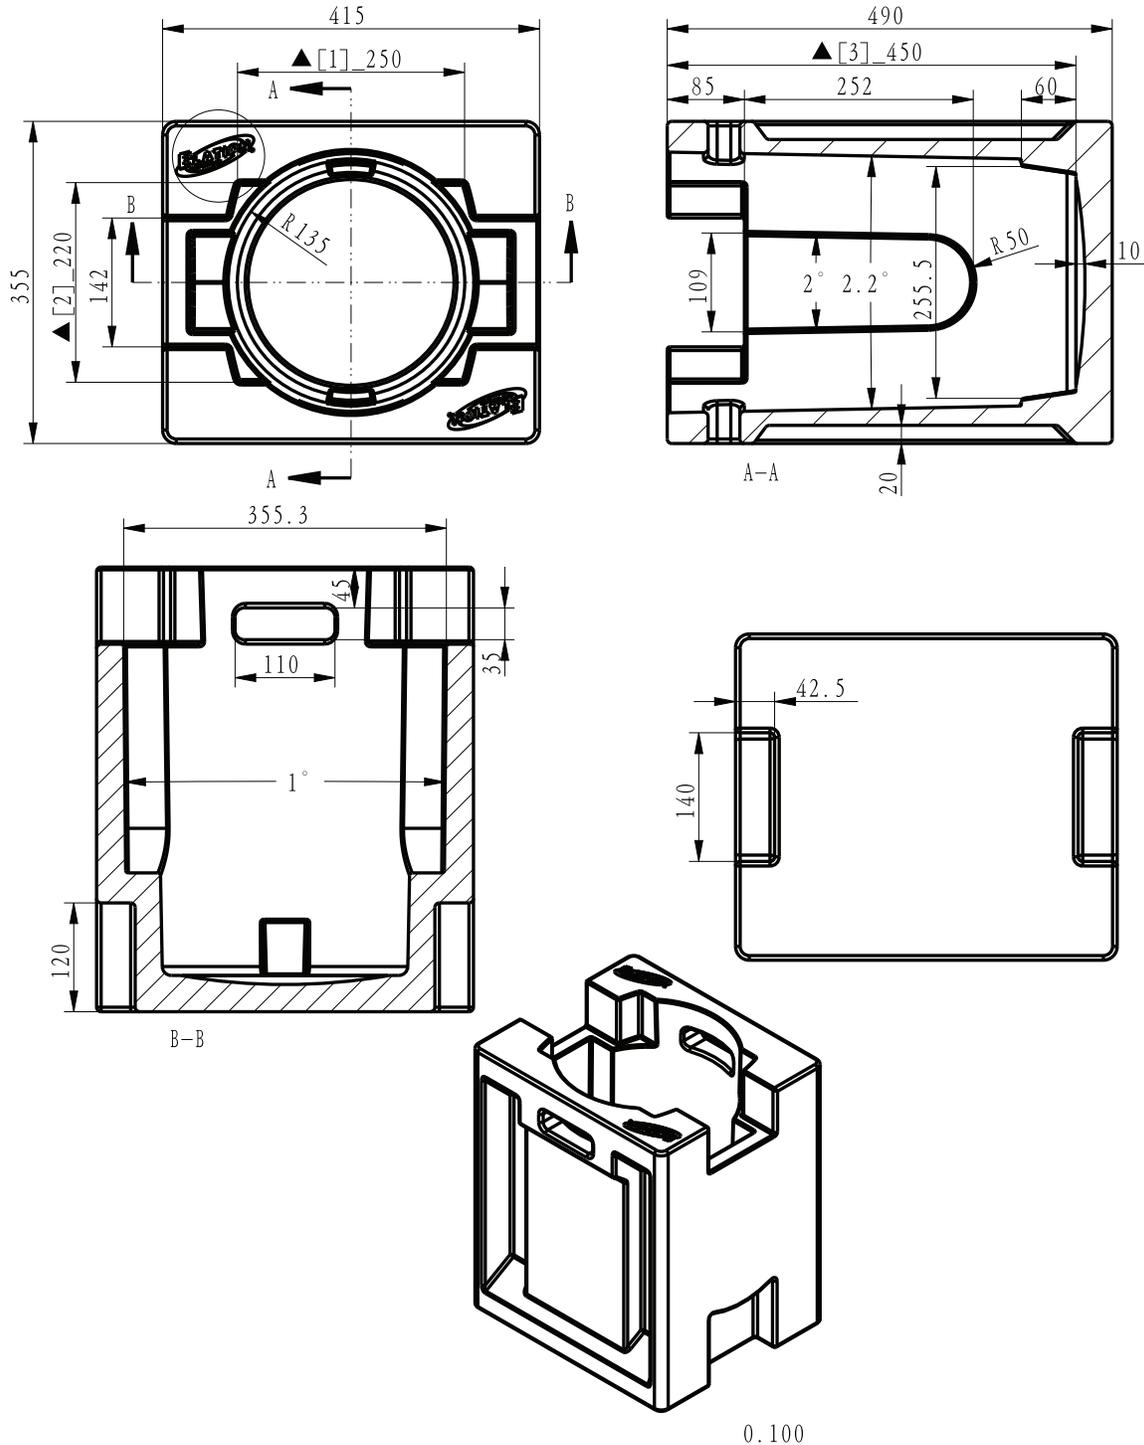

All dimensions in (mm) ©ELATION PROFESSIONAL all rights reserved.
 Information contained within this drawing is proprietary and confidential.
 Any reproduction and/or distribution of any part of this drawing without the written consent by Elation Professional is strictly prohibited. Diagrams and/or measurements herein subject to change without notice.

