

# ***ELATION***<sup>®</sup>



## **CORE IP**

legacy shutter barrel modification

©2025 ELATION PROFESSIONAL all rights reserved. Information, specifications, diagrams, images, and instructions herein are subject to change without notice. ELATION PROFESSIONAL logo and identifying product names and numbers herein are trademarks of ELATION PROFESSIONAL. Copyright protection claimed includes all forms and matters of copyrightable materials and information now allowed by statutory or judicial law or hereinafter granted. Product names used in this document may be trademarks or registered trademarks of their respective companies and are hereby acknowledged. All non-ELATION brands and product names are trademarks or registered trademarks of their respective companies.

**ELATION PROFESSIONAL** and all affiliated companies hereby disclaim any and all liabilities for property, equipment, building, and electrical damages, injuries to any persons, and direct or indirect economic loss associated with the use or reliance of any information contained within this document, and/or as a result of the improper, unsafe, insufficient and negligent assembly, installation, rigging, and operation of this product.

**Note:** For any questions or issues during the Shutter Barrel installation, contact our Customer Service Department.

## **CUSTOMER SUPPORT**

**ELATION SERVICE USA** - Monday - Friday 8:00am to 4:30pm PST  
323-582-3322 | [support@elationlighting.com](mailto:support@elationlighting.com)

**ELATION SERVICE EUROPE** - Monday - Friday 08:30 to 17:00 CET  
+31 45 546 85 63 | [support@elationlighting.eu](mailto:support@elationlighting.eu)

**REPLACEMENT PARTS** - please visit [parts.elationlighting.com](http://parts.elationlighting.com)

# COLOUR 5 PROFILE / WW PROFILE / CW PROFILE SHUTTER BARREL MODIFICATION INSTRUCTIONS


To enable the use of Elation legacy profile shutter barrels with the new KL CORE IP, perform the following modification.

**Tools Required:** #2 Phillips Screwdriver


**Step 1:** Remove the six screws holding the Shutter Assembly's two halves together. Set the screws aside for reassembly.




**Step 2:** Remove the top half of the barrel and take out the shutter blade and lens assembly.

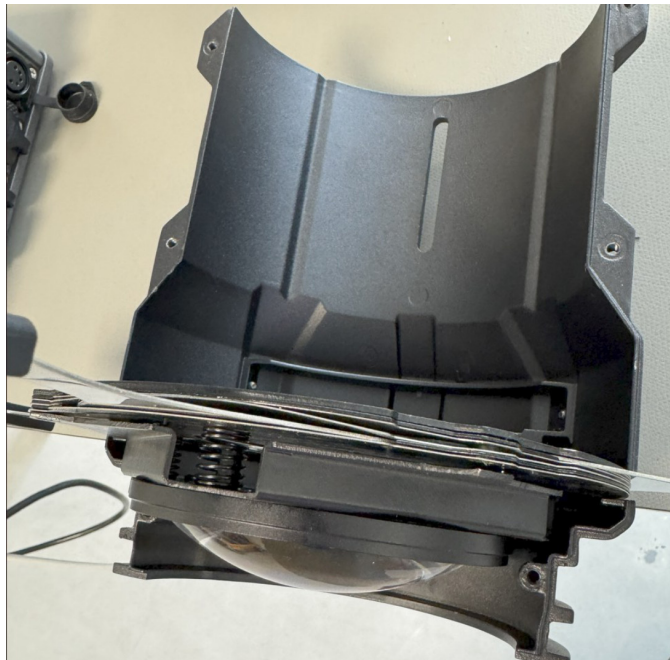

**Step 3:** Remove the four small screws from the lens holder assembly.

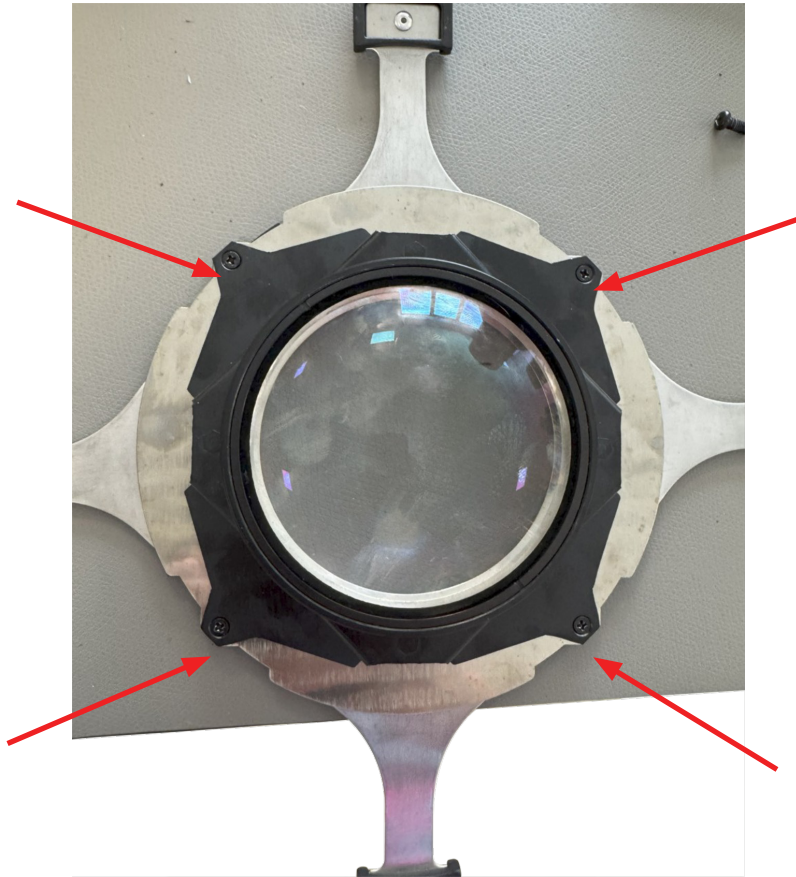


**Step 4:** Remove the four screws holding the lens in the assembly.

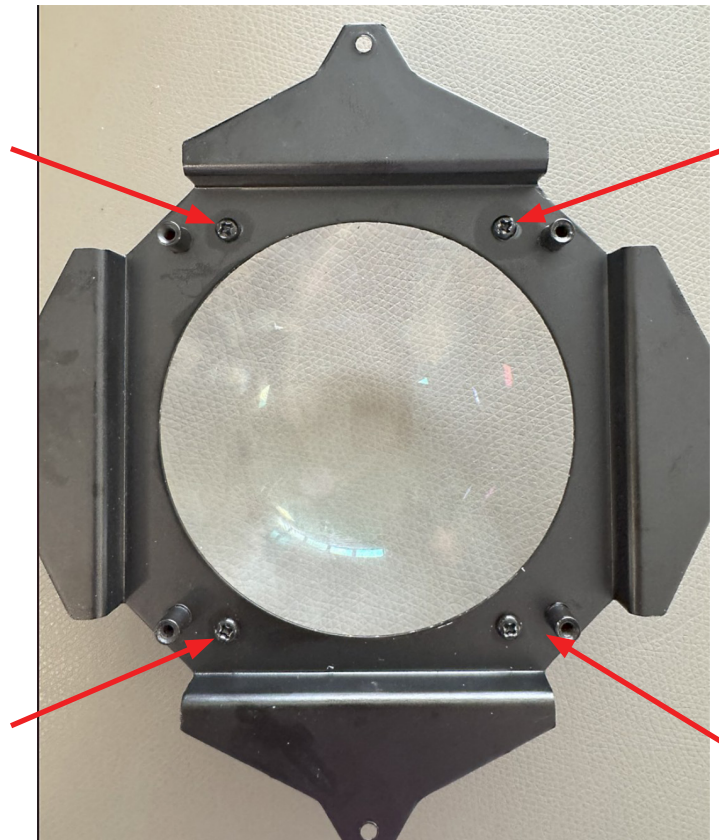


**Step 5:** Remove the lens from the holder assembly.




**Step 6:** Realign the holder assembly onto the shutter plate assembly, ensuring the screw posts are aligned over the pressure springs.

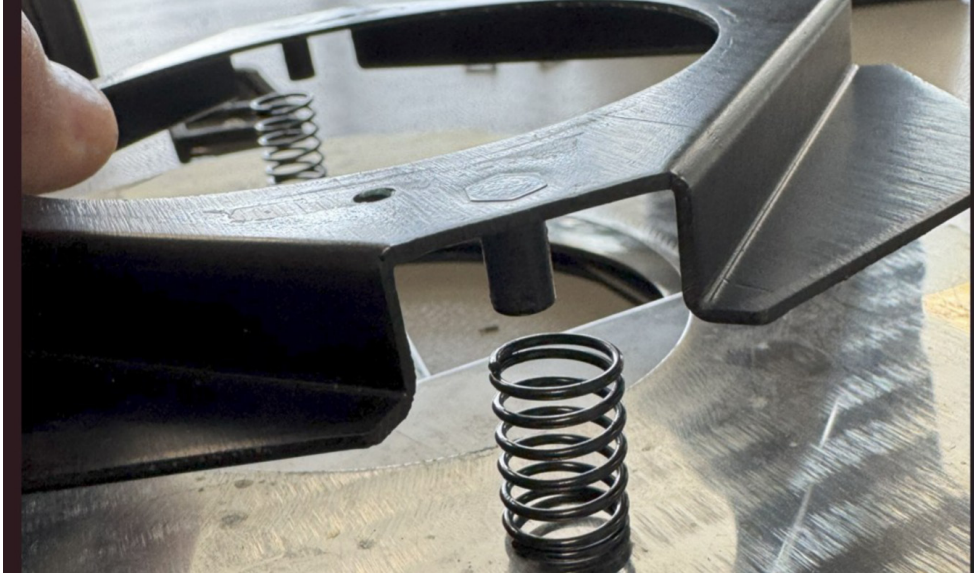

**Step 7:** Ensure the plates are aligned and reinsert the screws.

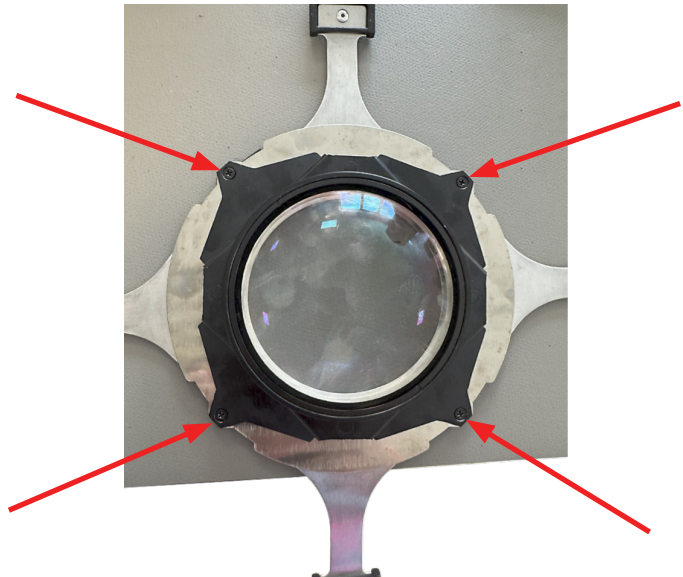

**Step 8:** Reinstall the Shutter Module into the barrel assembly.

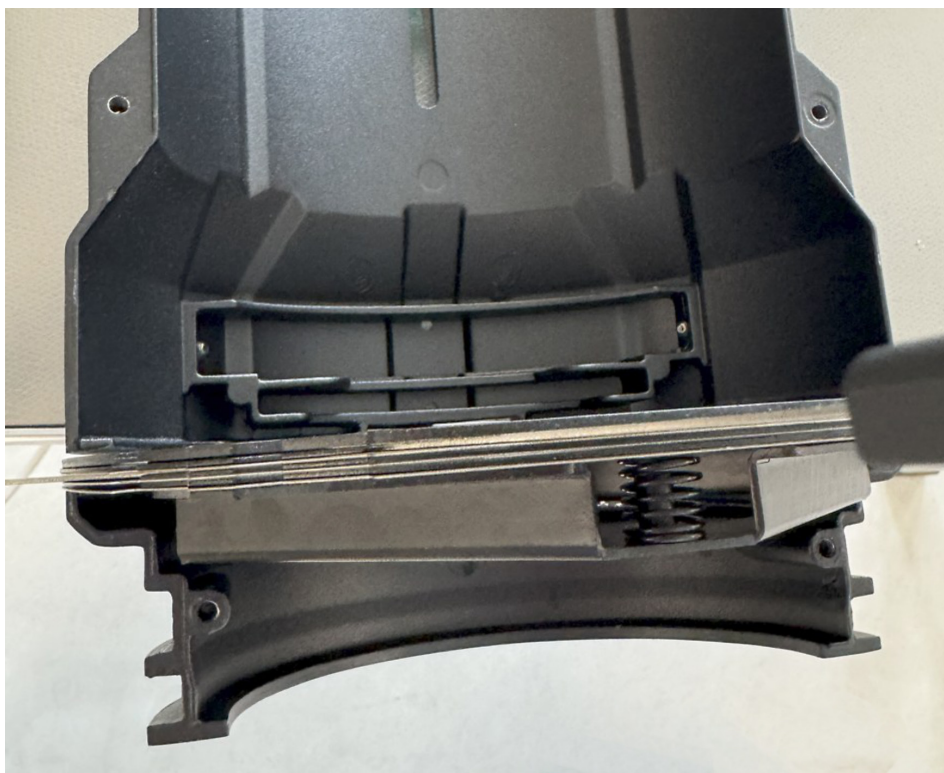

**Step 9:** Reinstall the top half of the Shutter Assembly, then insert and tighten the six screws.



**Step 10:** Install the Shutter Barrel into the KL Core.



