



4x100W RGBLA+ UV LEDs IP65 Light Engine

PRELIMINARY DATA SHEET



KEY FEATURES

400W RGBMA LED Engine

15,588 Total Fixture Lumen Output (Sphere)

Accepts 3rd Party Ellipsoidal Shutter Barrels

Stand-Alone Control with Touch Encoder and OLED Display

Direct Connection & Control for optional IP65 Gobo Rotator

NFC & Aria x2 Wireless Device Management

IP65 Rated

Delivering rich, full-spectrum color and 8,000 lumens of output, the **KL Batten 12** brings natural, full-spectrum light to stages, studios, and the outdoors—all in a compact, durable design.

Built for designers who demand professional color and powerful output, the **KL Batten 12** provides homogeneous, true-to-life color via RGBMA LED engine with high CRI that's natural on camera and on stage, producing a smooth, even field.

An IP-65 rating means it can be used nearly anywhere. Its quiet operation, intuitive control, and flexible mounting options make it a versatile, reliable, and colorful addition to any rig.





4x100W RGBLA+ UV LEDs IP65 Light Engine

SPECIFICATIONS

SOURCE

(4) x 100W RGBLA+ UV LEDs
30,000 Hour Average LED Life*

*May vary depending on several factors including but not limited to: Environmental Conditions, Power/Voltage, Usage Patterns (On-Off Cycling), Control and Dimming.

PHOTOMETRIC DATA

Total Lumen Output:
10,981 (Integrating Sphere)
CRI- 94.9
TLCI- 95
Beam Angle: 22° x 20°
Field Angle: 44° x 42°

EFFECTS

Full Pixel Control
Electronic Dimmer and Strobe
Variable 16-bit Dimming Modes and Curves

COLOR

RGBMA Color Array
CMY Emulation
16bit Fully Variable CCT 2400K - 8500K
Green/Magenta Shift
Dim-to-Warm Fade
Virtual Gel Swatch Book

CONTROL / CONNECTIONS

22 DMX Channel Modes (1ch, 3ch, 4ch-A, 4ch-B, 4ch-C, 9ch, 10ch, 14ch, 22ch, 16ch, 6ch, 8ch-A, 8ch-B, 20ch-A, 20ch-B, 32ch, 12ch, 16ch-A, 16ch-B, 40ch, 32ch, 54ch)
4 Button Control Panel, Color LED Display
RDM (Remote Device Management)
Aria x2 Wireless Device Management
NFC Configuration
IP65 5pin XLR DMX In/Out
IP65 RJ45 Ethernet In/Out (Art-Net & sACN)
IP65 Locking Power Cable In/Out

SIZE / WEIGHT

Length: 12.6" (321mm)
Width: 5.8" (148mm)
Vertical Height: 8.5" (217mm)
Weight: 14.7 lbs / 6.65kg

ELECTRICAL / THERMAL

AC 100-240V - 50/60Hz
200W Max Power Consumption
Power Thru Capacity: 11A (6 units @110V; 13 units @240V)
5°F to 113°F (-15°C to 45°C)
BTU/hr (+/- 10%) 682

INCLUDED ITEMS

Safety Cable
IP65 Locking Power Cable

OPTIONAL ITEMS

Omega Bracket (Qty.1)
L-Track to M10 Adapter, 70mm (LTR001)
L-Track to M10 Adapter, 44.5mm (LTR008)
L Track C-Clamp & Adapter Assembly, 70mm (LTR100)
L Track C-Clamp & Adapter Assembly, 44.5mm (LTR112)


KL BATTEN 12



ELATION®

4x100W RGBLA+ UV LEDs IP65 Light Engine

UNIT DIMENSIONS

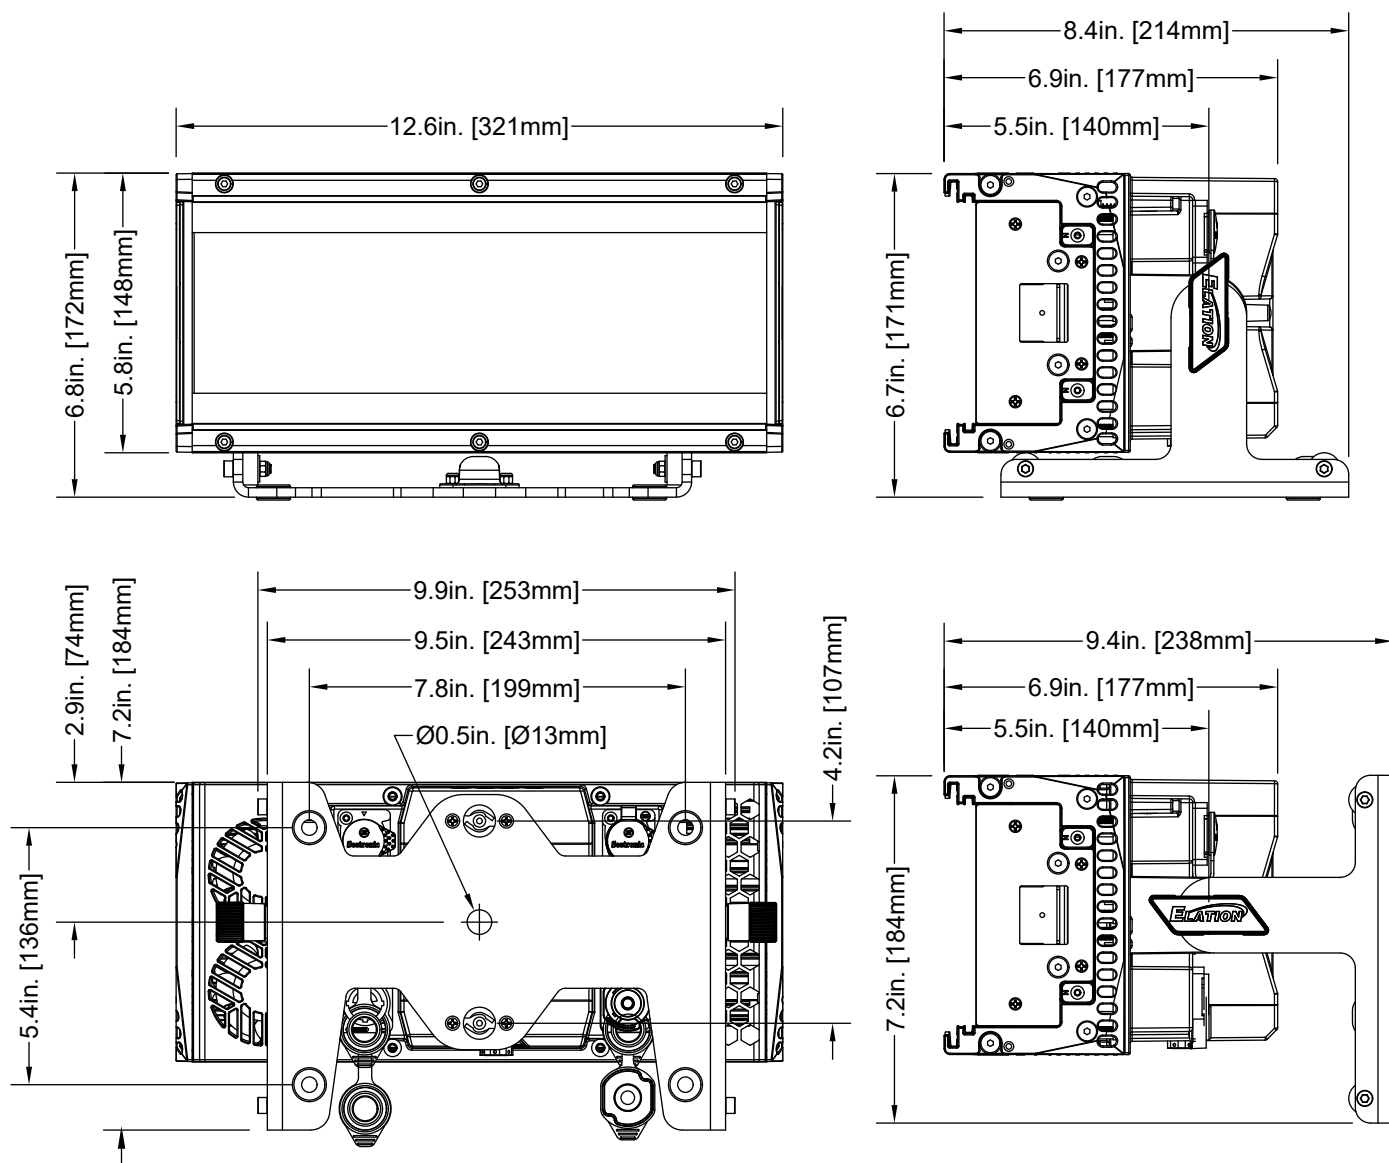

ORDERING INFORMATION

| SKU (US) | SKU (EU) | DESCRIPTION |
|----------|----------|--------------|
| KLB112 | N/A | KL Batten 12 |



Specifications are subject to change without notice ©Elation Professional 12/01/2025
 Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA. 90040
 323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com

Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, The Netherlands
 +31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu